3'-8" x 10'-0" Type C (1) with (2) 5'-0" Extensions

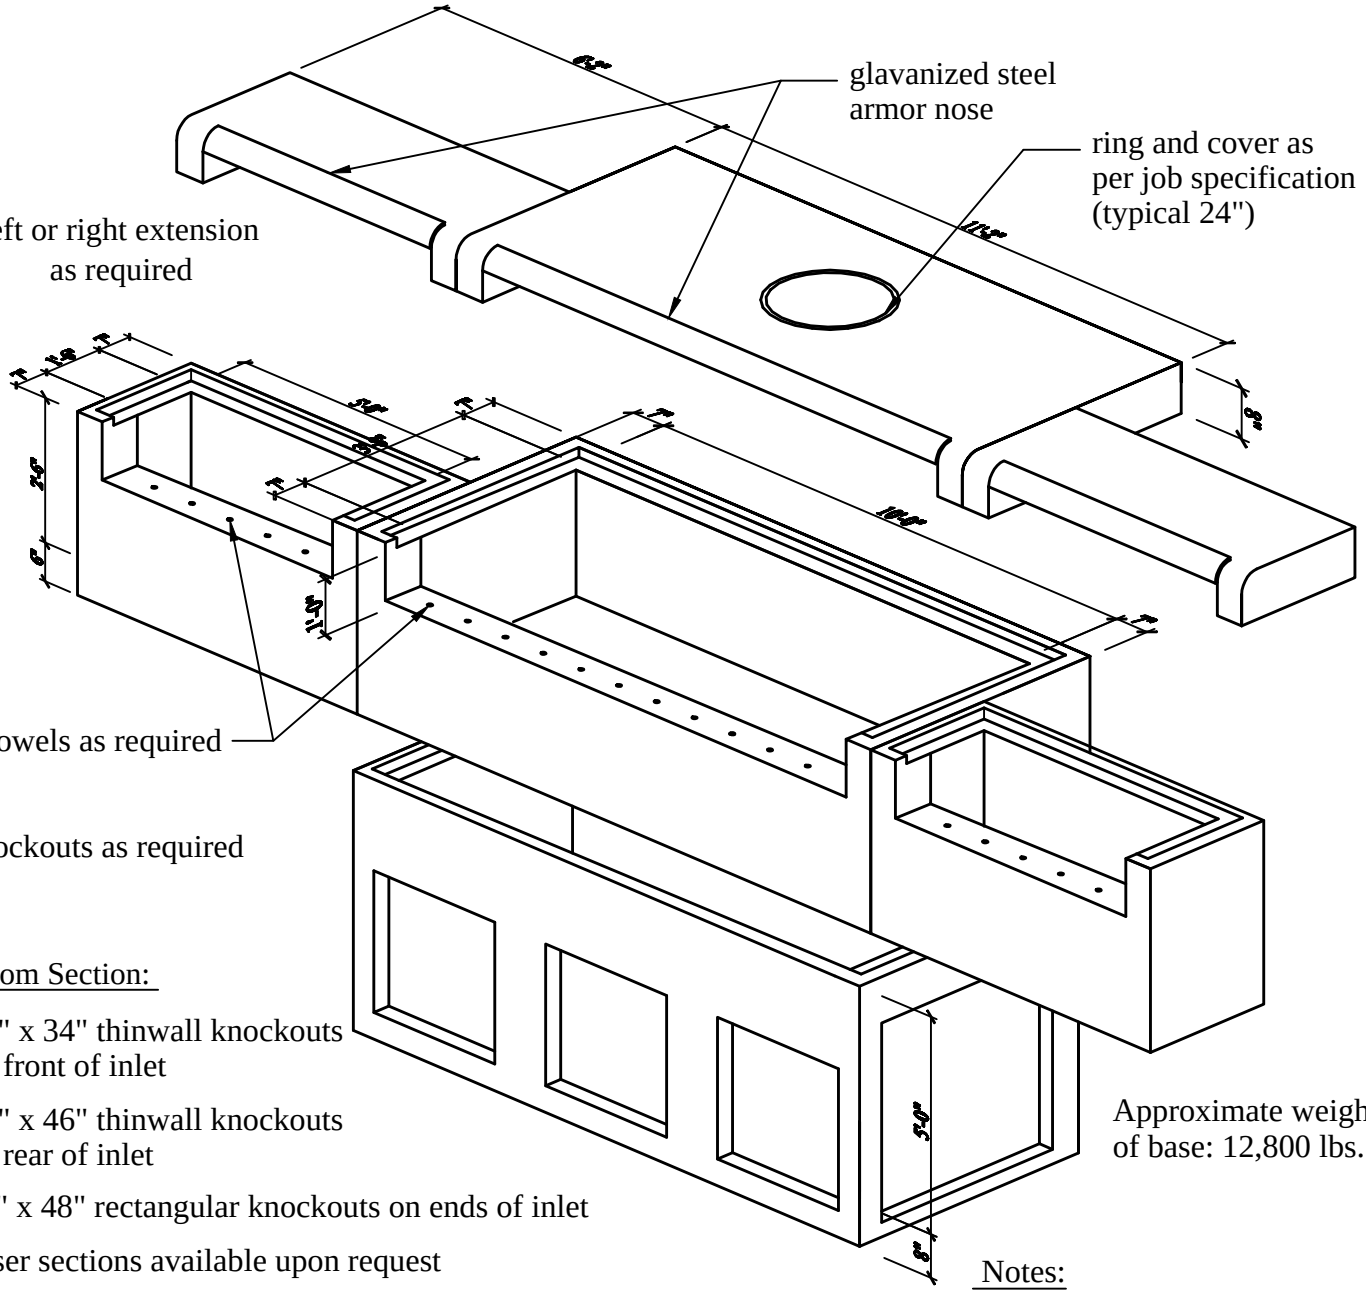

Bottom Section:

- 34" x 34" thinwall knockouts on front of inlet
- 34" x 46" thinwall knockouts on rear of inlet
- 44" x 48" rectangular knockouts on ends of inlet
- Riser sections available upon request
- Concrete has a 28 day strength of 5,000 psi
- Steel reinforcement is ASTM A615 grade 60
- Load design is H-20

Approximate weight of base: 12,800 lbs.

Notes:

- Consult manufacturer before handling
- The structure shall be placed on a compacted granular base

Capital Precast

CAPITAL PRECAST, INC.

800 WATSON LANE EAST
NEW BRAUNFELS, TEXAS 78130
PH. (830) 606-6200

FOR Briggs Ranch			
JOB			
DRAWN RW	DATE 3/20/2012	Rev. No.	SHEET 1 OF 1
FILE f:/users/renee/quotes/3'-8 x 10'with(2)5'extensions briggsranch			