

6' x 6' x Variable Area Inlet

Table Top

Opening/Ring & Cover per Job
(24" Ring & Cover Depicted)

Height: 14"

Walls: 6"

Approximate

Weight : 4,900 lbs

Standard Risers(s)

Height: 1' → 6.5'
(In 6" Increments)

Walls: 6"

Approximate

Weight : 1944 lbs/ft
(Per Vertical Foot)

Standard Base w/ T.W.K.O.

Height: 6.5' I.D.

Walls: 6"

Floor: 6"

Approximate

Weight : 13,325 lbs at 6.5' I.D.


Thin Wall Knockouts

Dimensions: 72"

Depth: 4"

Location: All Four Walls


(Special Base with Holes
as Requested Available)

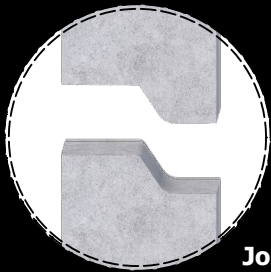

Joint Detail

Specifications:

- Concrete has a 28 day strength of 5,000 psi
- Steel reinforcement is ASTM A615 grade 60
- Load Design is AASHTO HS20-44

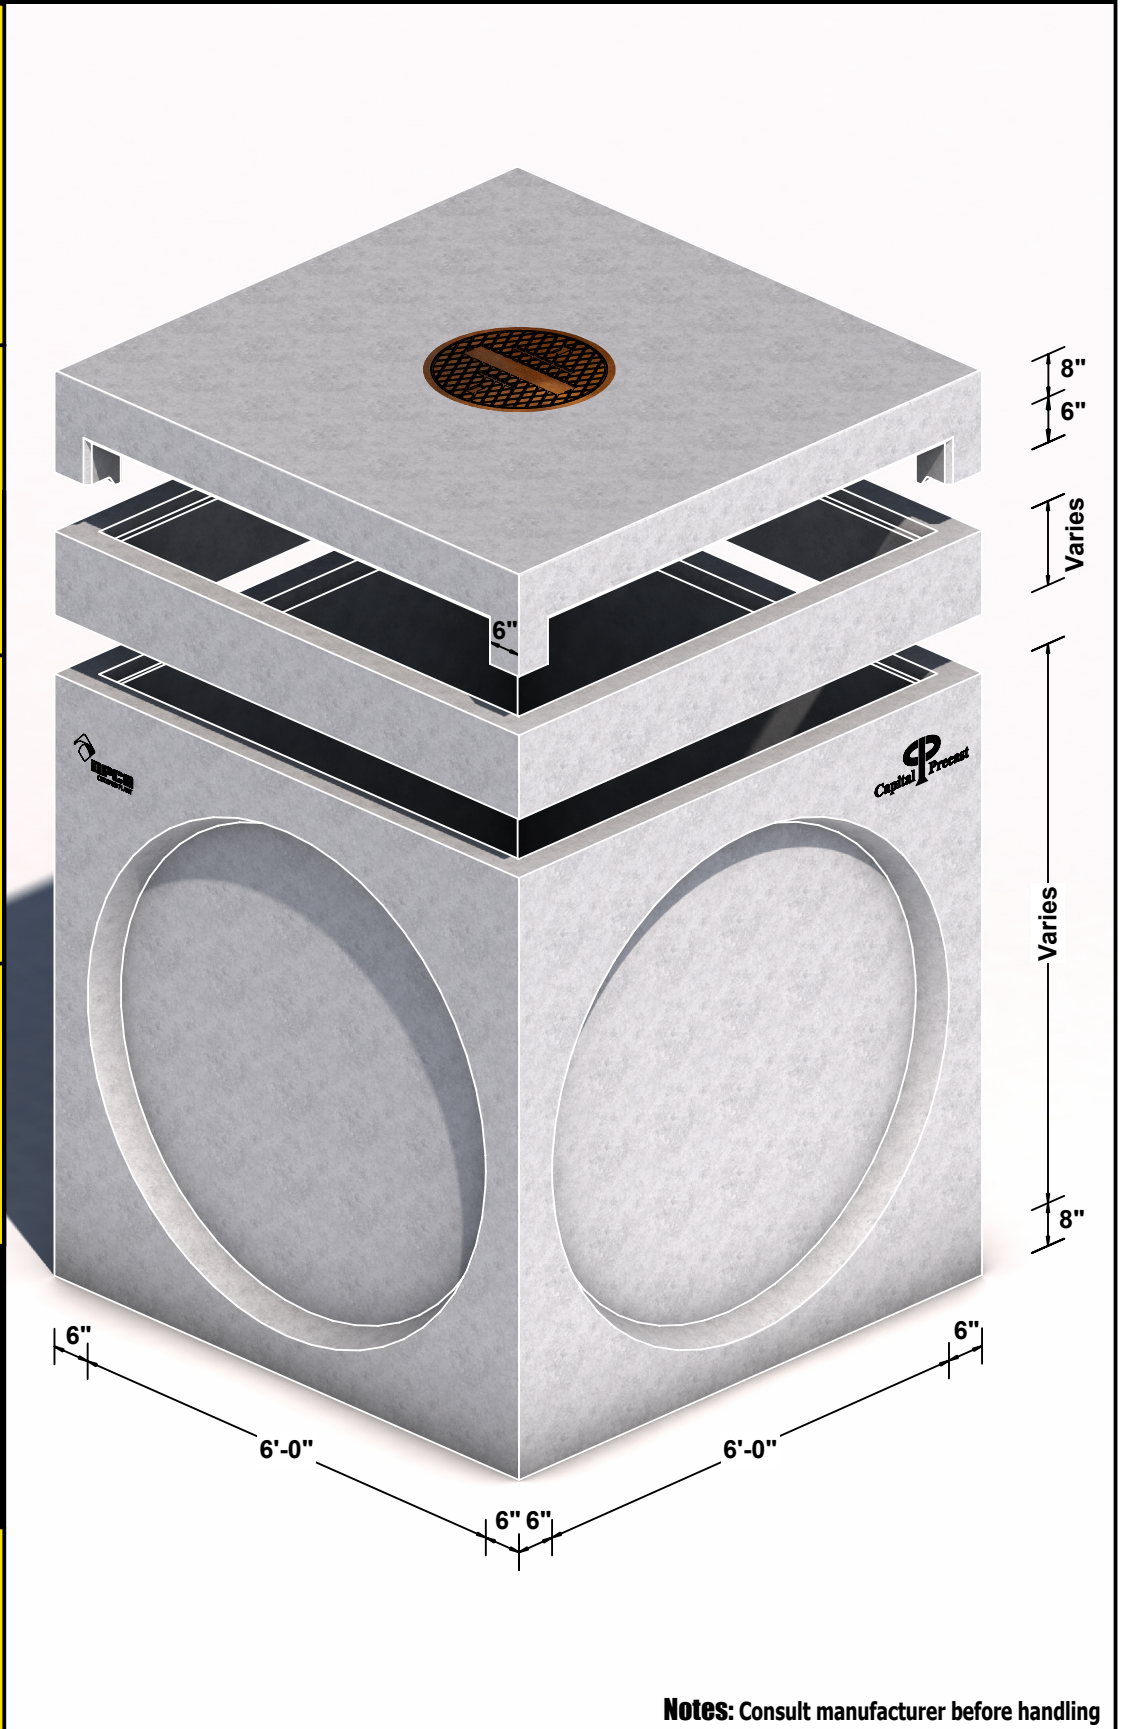

Notes: Consult manufacturer before handling



6905 South Old Bastrop Hwy
San Marcos Texas, 78666
PH: (830) 606-6200
capitalprecastllc.com

6' x 6' x Variable Area Inlet

Job:

Drawn:

JJ

Rev:

Date:

4/21/2026